

IGBT Chip in NPT-technology

FEATURES:

- 1200V NPT technology 180µm chip
- low turn-off losses
- short tail current
- positive temperature coefficient
- easy paralleling

This chip is used for:

 power module BSM15GD120DLC E3224



Applications:

drives

Chip Type	V _{CE}	I _{Cn}	Die Size	Package	Ordering Code
SIGC25T120CL	1200V	15A	5.71 x 4.53 mm ²	sawn on foil	Q67041- A4704-A003

MECHANICAL PARAMETER:

Raster size	5.71 x 4.53			
Emitter pad size	2 x (2.18 x 1.6)			
Gate pad size	1.09 x 0.68			
Area total / active	25.9 / 18.7			
Thickness	180	μm		
Wafer size	150	mm		
Flat position	270	grd		
Max.possible chips per wafer	555 pcs			
Passivation frontside	Photoimide			
Emitter metallization	3200 nm Al Si 1%			
Collector metallization	1400 nm Ni Ag –system suitable for epoxy and soft solder die bonding			
Die bond	electrically conductive glue or solder			
Wire bond	AI, <500μm			
Reject Ink Dot Size	Ø 0.65mm; max 1.2mm			
Recommended Storage Environment	store in original container, in dry nitrogen, < 6 month at an ambient temperature of 23°C			



MAXIMUM RATINGS:

Parameter	Symbol	Value	Unit
Collector-emitter voltage, T _j =25 °C	V _{CE}	1200	V
DC collector current, limited by T _{jmax}	I _C	1)	А
Pulsed collector current, t _p limited by T _{jmax}	I _{cpuls}	45	А
Gate emitter voltage	V _{GE}	±20	V
Operating junction and storage temperature	T_j , T_{stg}	-55 + 150	°C

¹⁾ depending on thermal properties of assembly

STATIC CHARACTERISTICS (tested on chip), T_i =25 °C, unless otherwise specified:

Parameter	Symbol Conditions	Value			Unit	
Tarameter	Official Conditions		min.	typ.	max.	
Collector-emitter breakdown voltage	V _{(BR)CES}	V_{GE} =0V , I_{C} =1.5mA	1200			
Collector-emitter saturation voltage	V _{CE(sat)}	V _{GE} =15V, I _C =15A	1.8	2.2	2.6	٧
Gate-emitter threshold voltage	V _{GE(th)}	I_C =0.6mA , V_{GE} = V_{CE}	4.5	5.5	6.5	
Zero gate voltage collector current	I _{CES}	V _{CE} =1200V , V _{GE} =0V			2	μA
Gate-emitter leakage current	I _{GES}	V _{CE} =0V , V _{GE} =30V			120	nA

ELECTRICAL CHARACTERISTICS (tested at component):

Parameter	Symbol C	Canditions	Value			Unit
raiametei	Symbol	Conditions	min.	typ.	max.	Oiiii
Input capacitance	Ciss	V _{CE} =25V,	-	1	-	nF
Output capacitance	Coss	$V_{GE}=0V$,	-	-	-	
Reverse transfer capacitance	Crss	f=1MHz	-	0.07	-	

SWITCHING CHARACTERISTICS (tested at component), Inductive Load


Parameter	Symbol	Conditions 1)	Value			Unit
- arameter	Symbol		min.	typ.	max.	Oilit
Turn-on delay time	$t_{d(on)}$	<i>T</i> _j =125°C	-	80	-	ns
Rise time	t_{r}	$V_{\rm CC} = 600 \text{V},$	-	50	-	
Turn-off delay time	$t_{d(off)}$	I _C =15A, V _{GE} =±15V,	-	340	-	
Fall time	t_{f}	$R_{\rm G}$ = 56Ω	-	50	-	

 $^{^{1)}}$ values also influenced by parasitic L- and C- in measurement and package.



CHIP DRAWING:

Die-Size 4530 um x 5710 um

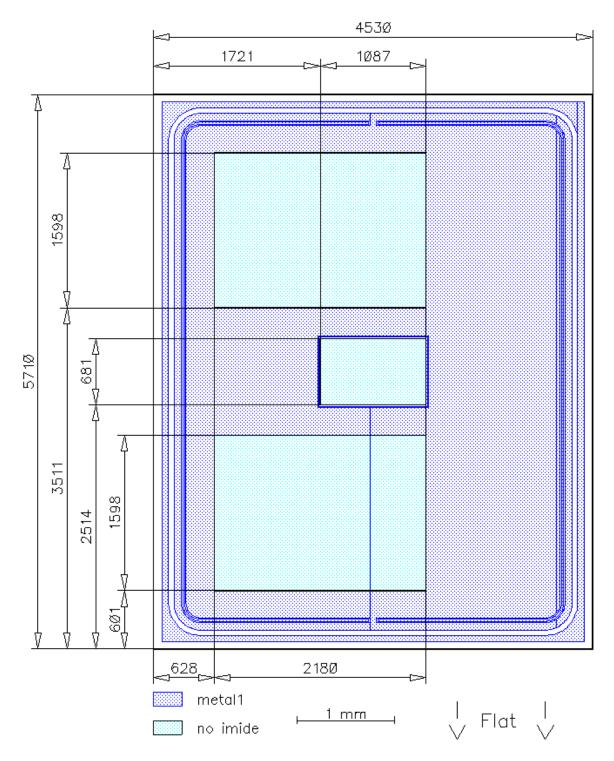



FURTHER ELECTRICAL CHARACTERISTICS:

This chip data sheet refers to the device data sheet	BSM15GD120DLC E3224	Package ECONO 2 short pin
--	---------------------	------------------------------

DESCRIPTION:

AQL 0,65 for visual inspection according to failure catalog

Electrostatic Discharge Sensitive Device according to MIL-STD 883

Test-Normen Villach/Prüffeld

Published by Infineon Technologies AG, Bereich Kommunikation St.-Martin-Strasse 53, D-81541 München © Infineon Technologies AG 2002 All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives world-wide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and / or maintain and sustain and / or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.